

# TECHNICAL DATA SHEET • SPECIFICATIONS


## FLUSH UNIVERSAL ACCESS DOOR WITH ADJUSTABLE FRAME

Concealed magnetic closure, no hinge

FLE-00

### INSTALLATION

Technical drawing FLE-00

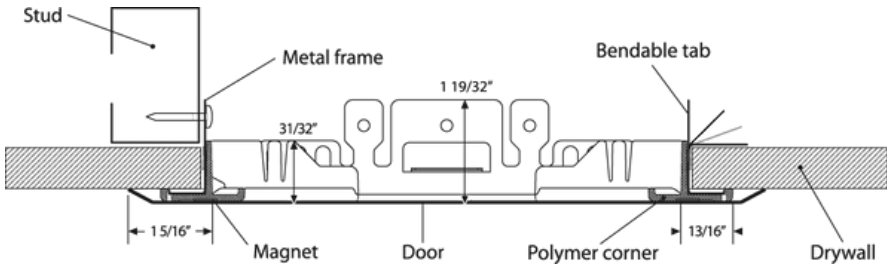


### STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Weight		Panel size
inches (mm)	inches (mm)	lbs	KG	inches
6.5 x 6.5 (165 x 165)	à 8 x 8 (203 x 203)	7.0	3.8	10 1/4 x 10 1/4
10.5 x 10.5 (266 x 266)	à 12 x 12 (304 x 304)	13.0	5.9	14 1/4 x 14 1/4
14 x 14 (355 x 355)	à 15.5 x 15.5 (393 x 393)	17.48	7.93	17 3/4 x 17 3/4
Available in 3 different sizes				

Rough wall opening = from 6.5" x 6.5" to 15.5" x 15.5"

ADJUSTABLE TO  
DIFFERENT OPENING SIZES  
(± 1 1/2" FOR HEIGHT AND  
FOR WIDTH

FOR SQUARE OR  
RECTANGULAR OPENINGS

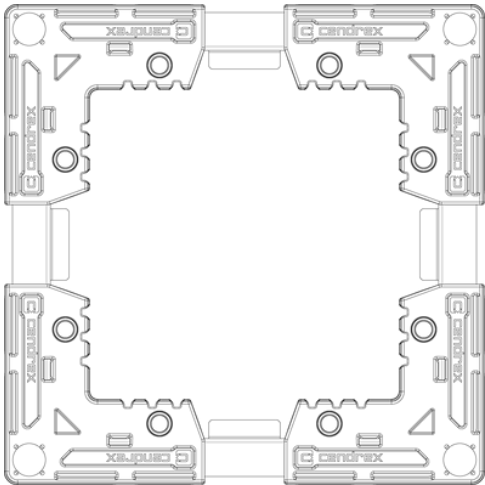

### DESCRIPTION AND MATERIAL SPECIFICATION

Material	20-gauge cold-rolled steel door and 24-gauge galvanized steel frame
Hinge	No hinge. Concealed magnetic closure.
Lock / Latch	4 magnets, 1 per polymer corner
Finish	High quality white powder coat primer
Packaging	Individually wrapped, available in single box (-PRO) or multipack (-W, 4 doors per box). Patented in Canada. Pat. 9,281,664 B2 in the United States.

#### EASY 2 MINUTE INSTALLATION

POWERFUL MAGNETS HOLD THE  
STURDY METAL PANEL IN PLACE

QUALITY FINISH PROVIDES A  
SUPERIOR AESTHETIC LOOK



### PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:
Special instructions:
Options:
Submittal approval: (Signature or stamp)

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- ☐ **35**  
Screwdriver operated cam latch



- ☐ **220**  
Screwdriver operated cylinder Cam latch



- ☐ **80**  
Ring/tool key operated slam latch



- ☐ **55**  
Hex head slam latch and ring key operated slam latch



- ☐ **30**  
Slide latch



- ☐ **50**  
Allen hex head cam latch

### HANDLES



- ☐ **25**  
WITH KEY - 4" handle and key operated cam latch



- ☐ **100K**  
Key-operated recessed handle cam latch with cap over key path



- ☐ **20**  
WITHOUT KEY - 4" handle operated cam latch



- ☐ **22**  
WITHOUT KEY - 4" handle operated slam latch



- ☐ **21**  
WITHOUT KEY Fixed 4" handle



- ☐ **26**  
WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- ☐ **10**  
Key-operated cylinder cam latch



- ☐ **15**  
Mortise cam latch preparation  
**15C**  
Mortise cam latch preparation, keyed differently  
**15CKA**  
Mortise cam latch preparation, keyed alike



- ☐ **85**  
Mortise slam latch



- ☐ **85C**  
Mortise slam latch with cylinder  
**85CKA**  
Mortise slam latch cylinder keyed alike



- ☐ **90**  
Pinned hex head cam latch



- ☐ **C**  
Cylinder cam latch, keyed differently



- ☐ **CKA**  
Cylinder cam latch, keyed alike

### MATERIALS



- ☐ **GS**  
Galvanneal steel



- ☐ **AL**  
Aluminum



- ☐ **SS**  
Stainless steel



- ☐ **CR**  
Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- ☐ **40**  
Mortise deadbolt lock



- ☐ **40C**  
Mortise Deadbolt Lock with Cylinder, keyed differently



- ☐ **40CKA**  
Mortise deadbolt lock with cylinder, keyed alike



- ☐ **99**  
Inside release thumbturn for mortise deadbolt lock



- ☐ **45**  
Mortise preparation for detention deadbolt lock



- ☐ **46**  
Detention deadbolt lock



- ☐ **47**  
CIDetention deadbolt Key

### OTHERS



- ☐ **60**  
Gasket



- ☐ **160**  
Holding cable



- ☐ **240**  
Masonry anchors