

# TECHNICAL DATA SHEET • SPECIFICATIONS


## FLUSH UNIVERSAL ACCESS DOOR WITH ADJUSTABLE FRAME

Concealed magnetic closure, no hinge

FLE-00

### INSTALLATION

Technical drawing FLE-00

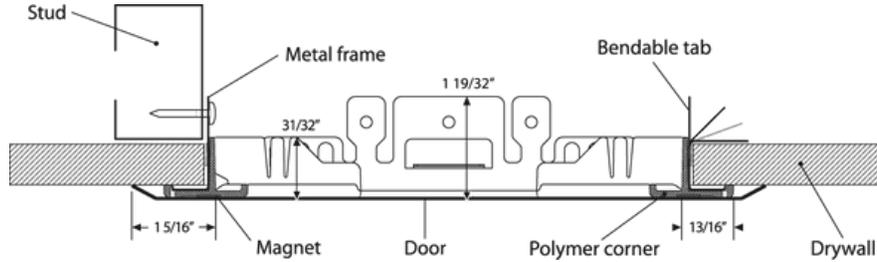

### STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Weight		Panel size
inches (mm)	inches (mm)	lbs	KG	inches
6.5 x 6.5 (165 x 165)	à 8 x 8 (203 x 203)	7.0	3.8	10 1/4 x 10 1/4
10.5 x 10.5 (266 x 266)	à 12 x 12 (304 x 304)	13.0	5.9	14 1/4 x 14 1/4
14 x 14 (355 x 355)	à 15.5 x 15.5 (393 x 393)	17.48	7.93	17 3/4 x 17 3/4


Available in 3 different sizes

Rough wall opening = from 6.5" x 6.5" to 15.5" x 15.5"

Patented in Canada.  
Pat. 9,281,664 B2 in the United States.

ADJUSTABLE TO DIFFERENT OPENING SIZES (± 1 1/2" FOR HEIGHT AND FOR WIDTH)

FOR SQUARE OR RECTANGULAR OPENINGS

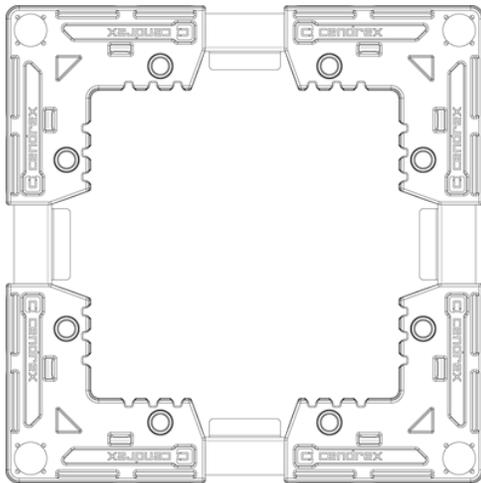

### DESCRIPTION AND MATERIAL SPECIFICATION

<b>Material</b>	20-gauge cold-rolled steel door and 24-gauge galvanized steel frame
<b>Hinge</b>	No hinge. Concealed magnetic closure.
<b>Lock / Latch</b>	4 magnets, 1 per polymer corner
<b>Finish</b>	High quality white powder coat primer
<b>Packaging</b>	Individually wrapped, available in single box (-PRO) or multipack (-W, 4 doors per box)

#### EASY 2 MINUTE INSTALLATION

POWERFUL MAGNETS HOLD THE STURDY METAL PANEL IN PLACE

QUALITY FINISH PROVIDES A SUPERIOR AESTHETIC LOOK



### PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval:  
(Signature or stamp)

HEAD OFFICE  
6500 Henri-Bourassa E. Blvd  
Montreal QC H1G 5W9

**cendrex**  
Made in Canada

Last updated: December 28, 2023

514-493-1489 | 1-800-479-1489  
info@cendrex.com | cendrex.com

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

### HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

### MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

### OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors