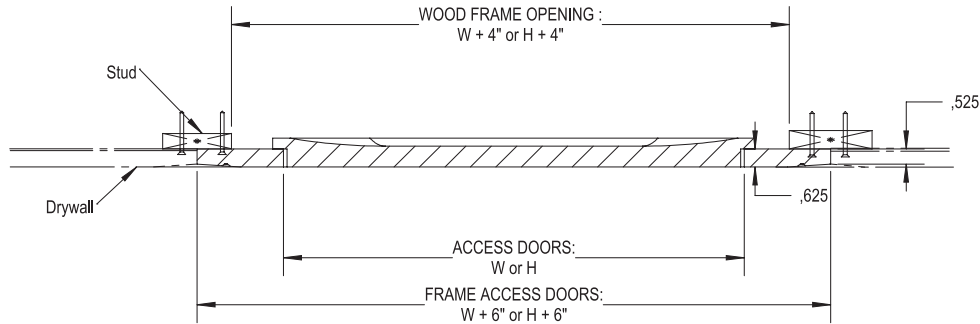
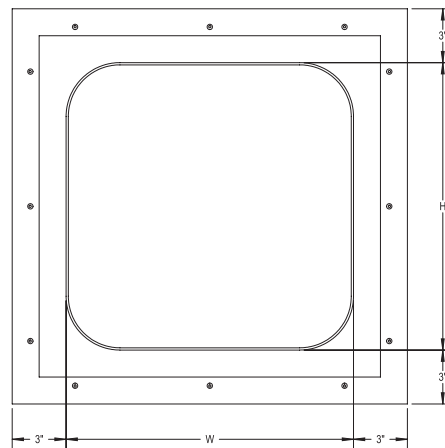


GLASS FIBER REINFORCED GYPSUM - ACCESS DOOR
PUSH UP RADIUS CORNERS - FOR DRYWALL CEILING ONLY
GFRG
GFRG-PUR
INSTALLATION

DIMENSION AND APPEARANCE

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
9 x 9 (229 x 229)	6	2.72
12 x 12 (304 x 304)	8	3.63
16 x 16 (406 x 406)	10	4.54
18 x 18 (457 x 457)	11	4.99
24 x 24 (609 x 609)	16	7.26

Rough wall opening = door size + 6"


DESCRIPTION AND MATERIAL SPECIFICATION

Material: Lightweight glass fiber reinforced gypsum.

Hinge: No hinge. Gravity based closure and removable door.

Lock / latch: None

Finish: Rounded corners (radius finish). To be primed and painted on site.

Odd sizes available: Non-stocked doors manufactured in 15 business days.

Packaging: Individually wrapped. 1 per box.

POPULAR OPTIONS For complete list of options go to: www.cendrex.com

Square corners, hinges, cylinder or screwdriver latch or round door, gasketing (neoprene gasket).

PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

HEAD OFFICE: 11 303, 26th avenue, Montreal, Quebec, Canada H1E 6N6

WAREHOUSES IN USA: California (2), Colorado, Florida, Illinois, Pennsylvania, Texas, Washington

Tel.: 514 493-1489 - 1 800 479-1489

Fax: 514 493-1992 - 1 800 297-1489

www.cendrex.com

info@cendrex.com