

TECHNICAL DATA SHEET • SPECIFICATIONS


FIRE-RATED UNINSULATED ACCESS DOOR WITH EXPOSED FLANGE

Self-latching tool-key operated slam latch, piano hinge

PFN-00

INSTALLATION

Technical drawing PFN-00

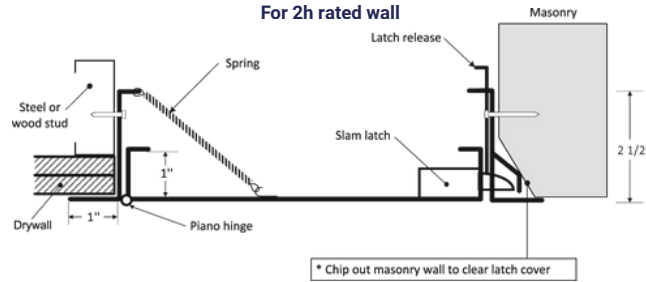

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements that apply to the installation and use of fire-rated access doors.

STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8 x 8	203 x 203	1	6.1	2.8
10 x 10	254 x 254	1	7.7	3.5
12 x 12	304 x 304	1	9.3	4.2
14 x 14	355 x 355	1	11.3	5.1
16 x 16	406 x 406	1	13.2	6.0
18 x 18	457 x 457	1	15.4	7.0
22 x 22	558 x 558	1	20.4	9.3
22 x 30	558 x 762	1	25.2	11.4
22 x 36	558 x 914	2	29.8	13.5
24 x 24	609 x 609	1	22.8	10.3
24 x 36	609 x 914	2	31.5	14.3
24 x 48	609 x 1219	2	39.5	17.7
30 x 30	762 x 762	1	31.9	14.5
32 x 32	812 x 812	2	35.8	16.2
36 x 36	914 x 914	2	42.3	19.2
48 x 48	1219 x 1219	2	62.9	28.1

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm


FOR VERTICAL USE ONLY:

Certified to standards: UL 10B (2008) (R2020), NFPA 252 (2022), CAN/ULC S104 (2015) (R2020).

Rating achieved: 1,5 hours, neutral/negative pressure

Maximum size: 48" wide x 48" high (1219mm x 1219 mm). Maximum area of 2304 in². Tolerance on height and width limitation is ± 3" (76 mm) as long as the area does not exceed 2304 in².

Temperature rise: No rating achieved.

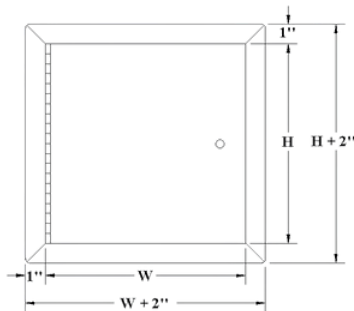

PROJET DATA

Project:	Date:	QTY	W	H
Architect:				
Dealer:				
Contractor:				
Location:				

DESCRIPTION AND MATERIAL SPECIFICATION

Material	16-gauge cold-rolled steel
Hinge	Continuous piano hinge, located in the second dimension (height)
Lock / Latch	Self-latching tool-key operated slam latch and/or ring operated slam latch, both included
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Inside panel release	Mechanism allowing panels to open from inside, standard on all doors over 12" x 12"

POPULAR OPTIONS

For complete list of options go to [cendrex.com](https://www.cendrex.com)

Lock / Latch	Key-operated cylinder cam latch (-10), mortise slam latch (-85, cylinder optional), mortise deadbolt lock (-40, cylinder optional)
Handle	Fixed 4" handle (-21), 4" handle-operated slam latch (-22)
Material	Stainless Steel (SS), Galvanneal steel (GS)
Other	Neoprene gasket (-60), masonry anchors (-240)



OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- ☐ **35**
Screwdriver operated
cam latch



- ☐ **220**
Screwdriver operated
cylinder Cam latch



- ☐ **80**
Ring/tool key operated slam
latch



- ☐ **55**
Hex head slam latch and ring key
operated slam latch



- ☐ **30**
Slide latch



- ☐ **50**
Allen hex head cam latch

HANDLES



- ☐ **25**
WITH KEY - 4" handle and key
operated cam latch



- ☐ **100K**
Key-operated recessed handle
cam latch with cap over key
path



- ☐ **20**
WITHOUT KEY - 4" handle
operated cam latch



- ☐ **22**
WITHOUT KEY - 4" handle
operated slam latch



- ☐ **21**
WITHOUT KEY
Fixed 4" handle



- ☐ **26**
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- ☐ **10**
Key-operated cylinder
cam latch



- ☐ **15**
Mortise cam latch preparation
15C
Mortise cam latch preparation,
keyed differently
15CKA
Mortise cam latch preparation,
keyed alike



- ☐ **85**
Mortise slam latch



- ☐ **85C**
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder
keyed alike



- ☐ **90**
Pinned hex head cam latch



- ☐ **C**
Cylinder cam latch,
keyed differently



- ☐ **CKA**
Cylinder cam latch,
keyed alike

MATERIALS



- ☐ **GS**
Galvanneal steel



- ☐ **AL**
Aluminum



- ☐ **SS**
Stainless steel



- ☐ **CR**
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- ☐ **40**
Mortise deadbolt lock



- ☐ **40C**
Mortise Deadbolt Lock with
Cylinder, keyed differently



- ☐ **40CKA**
Mortise deadbolt lock with
cylinder, keyed alike



- ☐ **99**
Inside release thumbturn for
mortise deadbolt lock



- ☐ **45**
Mortise preparation for
detention deadbolt lock



- ☐ **46**
Detention deadbolt lock



- ☐ **47**
CIDetention deadbolt Key

OTHERS



- ☐ **60**
Gasket



- ☐ **160**
Holding cable



- ☐ **240**
Masonry anchors