

TECHNICAL DATA SHEET • SPECIFICATIONS


FIRE-RATED UNINSULATED ACCESS DOOR WITH EXPOSED FLANGE

Self-latching tool-key operated slam latch, piano hinge

PFN-00

INSTALLATION

Technical drawing PFN-00

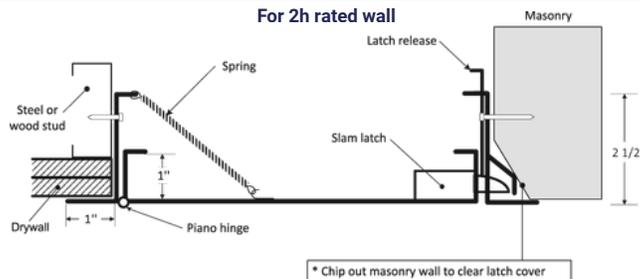

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements that apply to the installation and use of fire-rated access doors.

STANDARD DIMENSIONS AND APPEARANCE

| Dimensions • W X H | | Number of locks | Weight | |
|--------------------|-------------|-----------------|--------|------|
| inches | mm | | lbs | KG |
| 8 x 8 | 203 x 203 | 1 | 6.1 | 2.8 |
| 10 x 10 | 254 x 254 | 1 | 7.7 | 3.5 |
| 12 x 12 | 304 x 304 | 1 | 9.3 | 4.2 |
| 14 x 14 | 355 x 355 | 1 | 11.3 | 5.1 |
| 16 x 16 | 406 x 406 | 1 | 13.2 | 6.0 |
| 18 x 18 | 457 x 457 | 1 | 15.4 | 7.0 |
| 22 x 22 | 558 x 558 | 1 | 20.4 | 9.3 |
| 22 x 30 | 558 x 762 | 1 | 25.2 | 11.4 |
| 22 x 36 | 558 x 914 | 2 | 29.8 | 13.5 |
| 24 x 24 | 609 x 609 | 1 | 22.8 | 10.3 |
| 24 x 36 | 609 x 914 | 2 | 31.5 | 14.3 |
| 24 x 48 | 609 x 1219 | 2 | 39.5 | 17.7 |
| 30 x 30 | 762 x 762 | 1 | 31.9 | 14.5 |
| 32 x 32 | 812 x 812 | 2 | 35.8 | 16.2 |
| 36 x 36 | 914 x 914 | 2 | 42.3 | 19.2 |
| 48 x 48 | 1219 x 1219 | 2 | 62.9 | 28.1 |

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm


FOR VERTICAL USE ONLY:

Certified to standards: UL 10B (2008) (R2020), NFPA 252 (2022), CAN/ULC S104 (2015) (R2020).

Rating achieved: 3 hours, neutral/negative pressure

Maximum size: 48" wide x 48" high (1219mm x 1219 mm). Maximum area of 2304 in². Tolerance on height and width limitation is ± 3" (76 mm) as long as the area does not exceed 2304 in².

Temperature rise: No rating achieved.

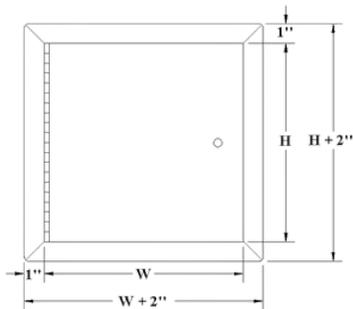

DESCRIPTION AND MATERIAL SPECIFICATION

| | |
|----------------------|---|
| Material | 16-gauge cold-rolled steel |
| Hinge | Continuous piano hinge, located in the second dimension (height) |
| Lock / Latch | Self-latching tool-key operated slam latch and/or ring operated slam latch, both included |
| Finish | High quality white powder coat primer |
| Packaging | Individually wrapped, 1 door per box |
| Inside panel release | Mechanism allowing panels to open from inside, standard on all doors over 12" x 12" |

POPULAR OPTIONS

For complete list of options go to cendrex.com

| | |
|--------------|--|
| Lock / Latch | Key-operated cylinder cam latch (-10), mortise slam latch (-85, cylinder optional), mortise deadbolt lock (-40, cylinder optional) |
| Handle | Fixed 4" handle (-21), 4" handle-operated slam latch (-22) |
| Material | Stainless Steel (SS), Galvanneal steel (GS) |
| Other | Neoprene gasket (-60), masonry anchors (-240) |



PROJET DATA

| | | | | |
|-------------|-------|-----|---|---|
| Project: | Date: | QTY | W | H |
| Architech: | | | | |
| Dealer: | | | | |
| Contractor: | | | | |
| Location: | | | | |

| |
|---|
| Tagging instructions: |
| Special instructions: |
| Options: |
| Submittal approval: (Signature or stamp) |

HEAD OFFICE
6500 Henri-Bourassa E. Blvd
Montreal QC H1G 5W9

cendrex
Made in Canada

Last updated: December 28, 2023
514-493-1489 | 1-800-479-1489
info@cendrex.com | cendrex.com

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors