


TECHNICAL DATA SHEET • SPECIFICATIONS

FIRE-RATED UNINSULATED ACCESS DOOR WITH PLASTER BEAD FLANGE Self-latching tool-key operated slam latch, piano hinge

PFN-PLY

INSTALLATION

Technical drawing PFN-PLY

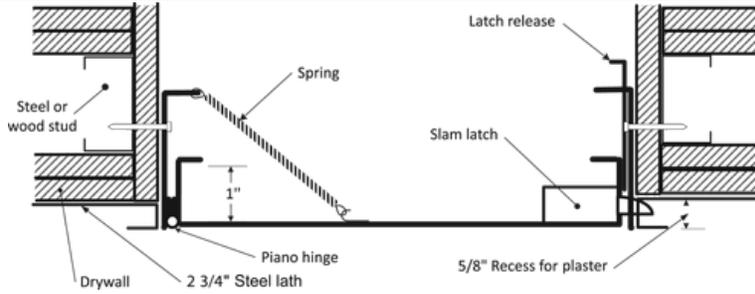

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements that apply to the installation and use of fire-rated access doors.

STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8 x 8	203 x 203	1	5.7	2.6
10 x 10	254 x 254	1	7.3	3.3
12 x 12	304 x 304	1	8.9	4.0
14 x 14	355 x 355	1	10.9	4.5
16 x 16	406 x 406	1	12.7	5.8
18 x 18	457 x 457	1	14.9	6.8
22 x 22	558 x 558	1	19.7	8.9
22 x 30	558 x 762	1	24.5	11.1
22 x 36	558 x 914	2	29.0	13.2
24 x 24	609 x 609	1	22.1	10.0
24 x 36	609 x 914	2	30.6	13.9
24 x 48	609 x 1219	2	39.5	17.7
30 x 30	762 x 762	1	31.1	14.1
32 x 32	812 x 812	2	35.0	15.9
36 x 36	914 x 914	2	41.3	18.7
48 x 48	1219 x 1219	2	62.9	28.1

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm


FOR VERTICAL USE ONLY:

Certified to standards: UL 10B (2008) (R2020), NFPA 252 (2022), CAN/ULC (2015) (R2020).

Rating achieved: 3 hours, neutral/negative pressure

Maximum size: 48" wide x 48" high (1219 mm x 1219 mm). Maximum area of 2304 in². Tolerance on height and width limitation is ± 3" (76 mm) as long as the area does not exceed 2304 in².

Temperature rise: No rating achieved.

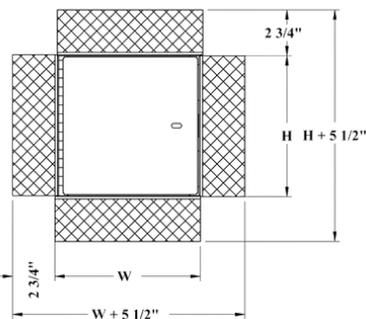

DESCRIPTION AND MATERIAL SPECIFICATION

Material	16-gauge cold-rolled steel
Hinge	Continuous piano hinge, located in the second dimension (height)
Lock / Latch	Self-latching tool-key operated slam latch and/or ring operated slam latch, both included
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Inside panel release	Mechanism allowing panels to open from inside, standard on all doors over 12" x 12"
Flange	22-gauge galvanized steel, 2 3/4" drywall bead flange
Frame	2 1/2" in depth, made of cold rolled steel

POPULAR OPTIONS

For complete list of options go to cendrex.com

Lock / Latch	Key-operated cylinder cam latch (-10), mortise slam latch (-85, cylinder optional), mortise deadbolt lock (-40, cylinder optional)
Handle	Fixed 4" handle (-21), 4" handle-operated slam latch (-22)
Material	Stainless Steel (SS)



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:
Special instructions:
Options:
Submittal approval: (Signature or stamp)

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

-  **35** Screwdriver operated cam latch

-  **220** Screwdriver operated cylinder Cam latch

-  **80** Ring/tool key operated slam latch

-  **55** Hex head slam latch and ring key operated slam latch

-  **30** Slide latch

-  **50** Allen hex head cam latch

HANDLES

-  **25** WITH KEY - 4" handle and key operated cam latch

-  **100K** Key-operated recessed handle cam latch with cap over key path

-  **20** WITHOUT KEY - 4" handle operated cam latch

-  **22** WITHOUT KEY - 4" handle operated slam latch

-  **21** WITHOUT KEY Fixed 4" handle

-  **26** WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

-  **10** Key-operated cylinder cam latch

-  **15** Mortise cam latch preparation
-  **15C** Mortise cam latch preparation, keyed differently
-  **15CKA** Mortise cam latch preparation, keyed alike

-  **85** Mortise slam latch

-  **85C** Mortise slam latch with cylinder
-  **85CKA** Mortise slam latch cylinder keyed alike

-  **90** Pinned hex head cam latch

- C** Cylinder cam latch, keyed differently
- CKA** Cylinder cam latch, keyed alike

MATERIALS

-  **GS** Galvanneal steel

-  **AL** Aluminum

-  **SS** Stainless steel

-  **CR** Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

-  **40** Mortise deadbolt lock

-  **40C** Mortise Deadbolt Lock with Cylinder, keyed differently
-  **40CKA** Mortise deadbolt lock with cylinder, keyed alike

-  **99** Inside release thumbturn for mortise deadbolt lock

-  **45** Mortise preparation for detention deadbolt lock

-  **46** Detention deadbolt lock

-  **47** CIDetention deadbolt Key

OTHERS

-  **60** Gasket

-  **160** Holding cable

-  **240** Masonry anchors