


HEAVY DUTY ACCESS DOOR FOR LARGE OPENINGS WITH PLASTER BEAD FLANGE

Self-latching tool-key operated slam latch and ring operated slam latch, piano hinge

LHD-PLY


INSTALLATION

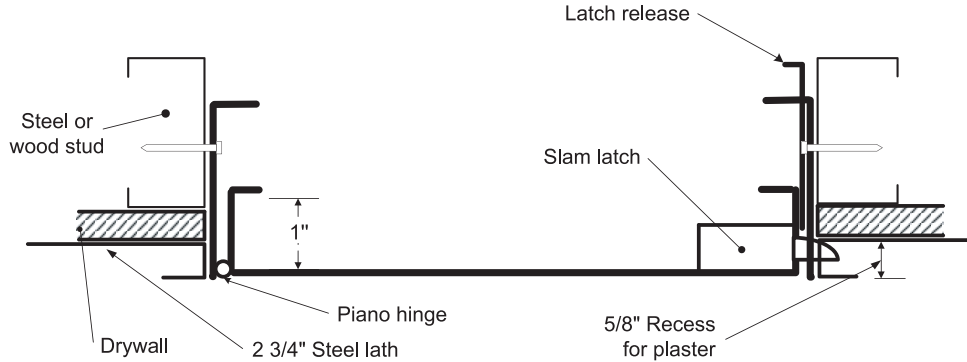

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS KG	
48 x 48 (1219 x 1219)	2	62.8	28.5
<div style="background-color: #4CAF50; color: white; padding: 5px; border-radius: 10px; display: inline-block;"> Your odd sizes: Made in 5 days </div>			

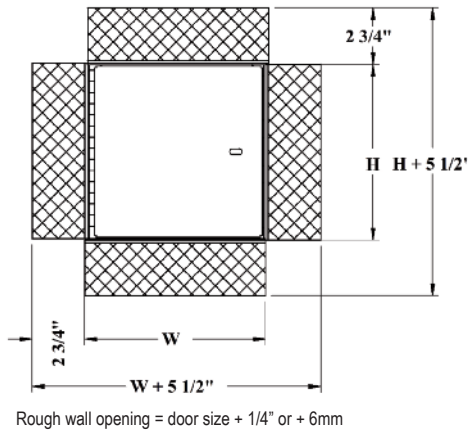

DESCRIPTION AND MATERIAL SPECIFICATION

- Material:** 16-gauge cold rolled steel
- Hinge:** Continuous piano hinge
- Locking mechanism:** Self-latching tool-key operated slam latch and ring operated slam latch, both included
- Flange:** Galvanized steel, 2 3/4 plaster bead flange
- Frame:** 2 1/2" in depth, made of 16-gauge cold rolled steel
- Inside panel release:** Mechanisms to allow panels to open from inside, standard on all doors over 12 x 12 inches
- Finish:** High quality white powder coat primer
- Packaging :** Individually wrapped, 1 per box

POPULAR OPTIONS

For complete list of options go to:
cendrex.com/en/custom/options

- Lock / latch:** Key operated cylinder cam latch, handle operated slam latch, mortise preparation for cylinder (cylinder optional), mortise deadbolt lock
- Design:** Double leaf

CENDREX PARTNERS



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			