
# **TECHNICAL DATA SHEET • SPECIFICATIONS**

# FLUSH UNIVERSAL ACCESS DOOR WITH DRYWALL BEAD FLANGE Screwdriver latch, pin hinge

**AHD-GYP-00** 

### **INSTALLATION**

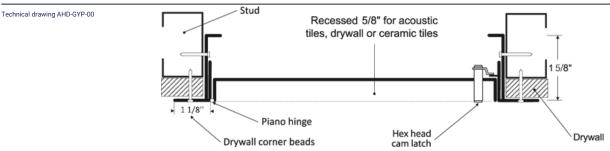

### STANDARD DIMENSIONS AND APPEARANCE


Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8 x 8	203 x 203	1	3.1	1.4
10 x 10	254 x 254	1	4.2	1.8
12 x 12	304 x 304	1	5.4	2.3
14 x 14	356 x 356	1	6.8	3.2
16 x 16	406 x 406	1	8.3	3.6
18 x 18	457 x 457	1	10.1	4.5
18 x 24	457 x 609	1	12.7	5.4
22 x 22	558 x 558	1	14.1	5.9
24 x 24	609 x 609	1	16.1	6.8

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

#### OTHER TECHNICAL INFORMATION

Piano hinge on doors over 24 inches (height or width)
The HHD-GYP model is recommended for over 1296 sq. inches

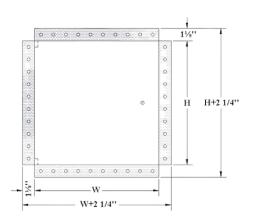

## **DESCRIPTION AND MATERIAL SPECIFICATION**

Material	16 gauge cold rolled steel
Hinge	Hot-rolled and stamped pin hinge, located on the second dimension (height)
Lock / Latch	Screwdriver operated cam latch in cold rolled steel
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Flange	22-gauge galvanized steel, 1 1/8" drywall bead flange
Frame	1 ½" in depth, made of cold rolled steel

#### **POPULAR OPTIONS**

For complete list of options go to cendrex.com

Lock / Latch	Key-operated cylinder cam latch (-10), mortise cam latch preparation (-15, cylinder optional), hex head cam latch (-50)	
Handle	4" handle-operated cam latch (-20), 4" handle and key operated cam latch (-25)	
Material	Stainless steel (SS)	



### **PROJET DATA**

Project:	Date:	QTY	W	Н
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval: (Signature or stamp)



# **TECHNICAL DATA SHEET • OPTIONS**

### **OPTIONS**

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

# LOW SECURITY LOCKING MECHANISM



Screwdriver operated cam latch



220
Screwdriver operated cylinder Cam latch



Ring/tool key operated slam latch



Hex head slam latch and ring key operated slam latch



] **30** Slide latch



50 Allen hex head cam latch

#### **HANDLES**



WITH KEY - 4" handle and key operated cam latch



Key-operated recessed handle cam latch with cap over key path



WITHOUT KEY - 4" handle operated cam latch



WITHOUT KEY - 4" handle operated slam latch



21 WITHOUT KEY Fixed 4" handle



26 WITHOUT KEY - L handle

# MEDIUM SECURITY LOCKING MECHANISM



To Key-operated cylinder cam latch



Mortise cam latch preparation 15C

Mortise cam latch preparation, keyed differently 15CKA Mortise cam latch preparation,

Mortise cam latch pi keyed alike



Mortise slam latch



Mortise slam latch with cylinder

85CKA

Mortise slam latch cylinder keyed alike



Pinned hex head cam latch



Cylinder cam latch, keyed differently



#### **MATERIALS**



Galvanneal steel



AL Aluminum



Stainless steel



Cold rolled steel

# HIGH SECURITY LOCKING MECHANISM



40 Mortise deadbolt lock



40C Mortise Deadbolt Lock with Cylinder, keyed differently

Mortise deadbolt lock with cylinder, keyed alike



Inside release thumbturn for mortise deadbolt lock



Mortise preparation for detention deadbolt lock



Detention deadbolt lock



47 CIDetention deadbolt Key

#### **OTHERS**



Gasket



160 Holding cable



240 Masonry anchors

