


# TECHNICAL DATA SHEET • SPECIFICATIONS

## ANTI-LIGATURE DOOR WITH DRYWALL BEAD FLANGE Key-operated cylinder cam latch, piano hinge

ALN-GYP

### INSTALLATION

Technical drawing ALN-GYP

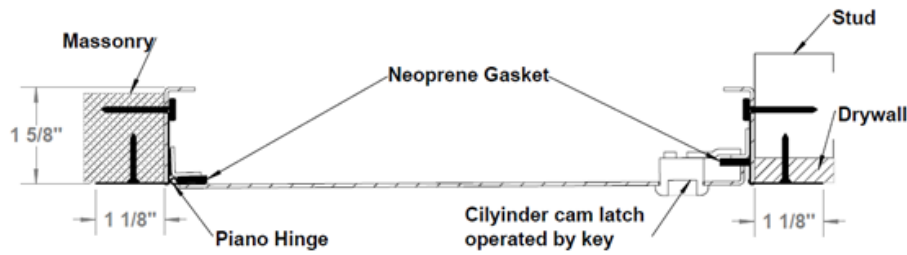

### STANDARD DIMENSIONS AND APPEARANCE


Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
12 x 12	305 x 305	2	5.0	2.3
16 x 16	406 x 406	2	8.0	3.6
18 x 18	457 x 457	2	10.0	4.5
24 x 24	610 x 610	2	15.0	6.8
24 x 36	609 x 914	3	22.0	10.0

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

### OTHER TECHNICAL INFORMATION

The HHD-GYP model is recommended for dimensions over 36" x 36".

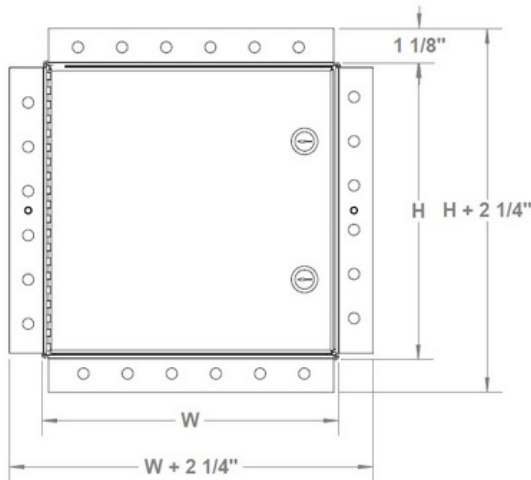

### DESCRIPTION AND MATERIAL SPECIFICATION

<b>Material</b>	16-gauge cold-rolled steel
<b>Hinge</b>	Continuous piano hinge, located in the second dimension (height)
<b>Lock / Latch</b>	Key-operated cylinder cam latch
<b>Finish</b>	High quality white powder coat primer
<b>Packaging</b>	Individually wrapped, 1 door per box
<b>Gasketing</b>	Neoprene around perimeter of door frame

### POPULAR OPTIONS

For complete list of options go to [cendrex.com](http://cendrex.com)

<b>Lock / Latch</b>	Pinned hex head cam latch (-90)
<b>Material</b>	Stainless Steel (SS), Galvanneal steel (GS)



### PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions: \_\_\_\_\_

Special instructions: \_\_\_\_\_

Options: \_\_\_\_\_

Submittal approval:  
(Signature or stamp) \_\_\_\_\_

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

### HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

### MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

### OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors