


# TECHNICAL DATA SHEET • SPECIFICATIONS

## FLUSH UNIVERSAL ACCESS DOOR WITH HIDDEN FLANGE Screwdriver-operated cam latch, concealed double-arm hinge

CTR-00

### INSTALLATION

Technical drawing CTR-MAG

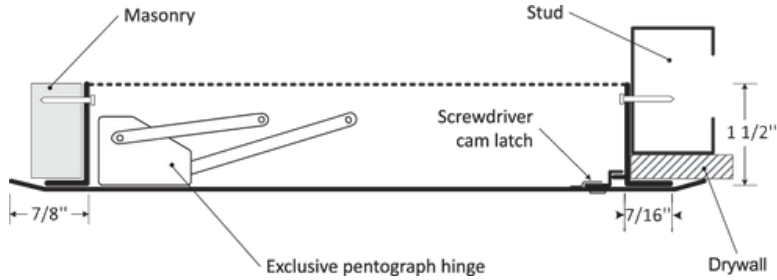


### STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8.25 x 8.25	210 x 210	1	3.8	1.7
8.25 x 12	210 x 305	1	5.0	2.3
10 x 10	254 x 254	1	4.8	2.2
12 x 12	305 x 305	1	6.1	2.8
12 x 18	305 x 457	1	8.4	3.8
14 x 14	356 x 356	1	7.5	3.4
16 x 16	406 x 406	1	9.0	4.1
18 x 18	457 x 457	3	10.9	4.9
18 x 24	457 x 610	3	13.5	6.1
20 x 20	508 x 508	3	12.8	5.8
22 x 22	559 x 559	3	15.0	6.8
22 x 30	559 x 762	4	19.0	8.6
22 x 36	559 x 914	5	22.2	10.1
24 x 24	610 x 610	3	16.9	7.7
24 x 30	610 x 762	5	21.2	9.6
24 x 36	610 x 914	5	23.6	10.7

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

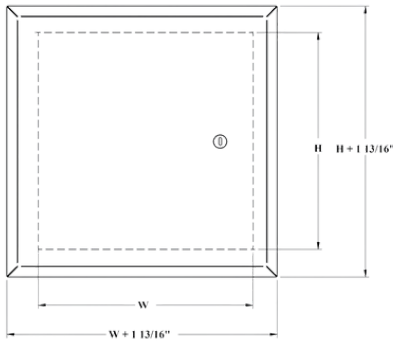

### PROJECT DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

### DESCRIPTION AND MATERIAL SPECIFICATION

<b>Material</b>	16-gauge cold-rolled steel
<b>Hinge</b>	Concealed, exclusive pantograph double-arm design hinge, located on the second dimension (height)
<b>Lock / Latch</b>	Screwdriver-operated cam latch in cold-rolled steel
<b>Finish</b>	High quality white powder coat primer
<b>Packaging</b>	Individually wrapped, 1 door per box
<b>POPULAR OPTIONS</b> For complete list of options go to <a href="http://cendrex.com">cendrex.com</a>	
<b>Lock / Latch</b>	Key-operated cylinder cam latch (-10), mortise cam latch preparation (-15, cylinder optional), hex head cam latch (-50)
<b>Handle</b>	4" handle-operated cam latch (-20), 4" handle and key operated cam latch (-25)
<b>Material</b>	Stainless Steel (SS), Galvanneal steel (GS)
<b>Other</b>	Neoprene gasket (-60)



## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

### HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

### MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

### OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors