

# TECHNICAL DATA SHEET • SPECIFICATIONS


## FLUSH REMOVABLE ACCESS DOOR WITH DRYWALL BEAD FLANGE

Concealed push latches, concealed spring pin hinge

EDG-GYP

### INSTALLATION

Technical drawing EDG-GYP

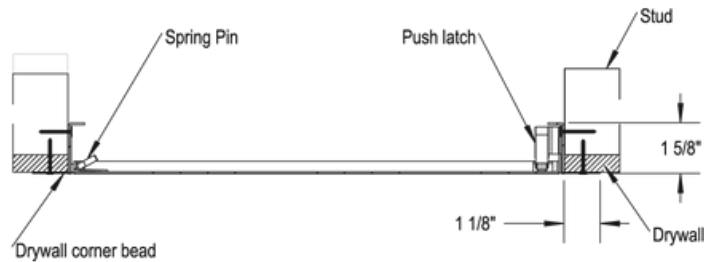

### STANDARD DIMENSIONS AND APPEARANCE


| Dimensions • W X H |           | Number of locks | Weight |     |
|--------------------|-----------|-----------------|--------|-----|
| inches             | mm        |                 | lbs    | KG  |
| 6 x 6              | 152 x 152 | 1               | 2.3    | 1.0 |
| 8 x 8              | 203 x 203 | 1               | 3.2    | 1.5 |
| 8 x 12             | 203 x 305 | 1               | 4.5    | 2.0 |
| 10 x 10            | 254 x 254 | 1               | 4.3    | 2.0 |
| 12 x 12            | 305 x 305 | 2               | 5.7    | 2.6 |
| 12 x 16            | 305 x 406 | 2               | 7.0    | 3.2 |
| 12 x 18            | 305 x 457 | 2               | 7.9    | 3.6 |
| 12 x 24            | 305 x 610 | 2               | 9.9    | 4.5 |
| 14 x 14            | 356 x 356 | 2               | 7.0    | 3.2 |
| 16 x 16            | 406 x 406 | 2               | 8.5    | 3.9 |
| 18 x 18            | 457 x 457 | 2               | 10.3   | 4.7 |
| 18 x 24            | 457 x 610 | 2               | 12.9   | 5.9 |
| 20 x 20            | 508 x 508 | 2               | 12.1   | 5.5 |
| 22 x 22            | 559 x 559 | 2               | 14.3   | 6.7 |
| 22 x 30            | 559 x 762 | 2               | 18.2   | 8.4 |
| 22 x 36            | 559 x 914 | 2               | 21.2   | 9.6 |
| 24 x 24            | 610 x 610 | 2               | 16.2   | 7.5 |

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

### OTHER TECHNICAL INFORMATION

Doors > 12" X 12" have 2 concealed push latches

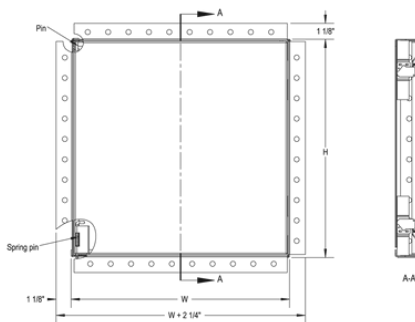

### DESCRIPTION AND MATERIAL SPECIFICATION

|                     |  |
|---------------------|--|
| <b>Material</b>     | 16-gauge cold-rolled steel   |
| <b>Hinge</b>        | Concealed spring pin hinge, located on the second dimension (height) |
| <b>Lock / Latch</b> | Concealed push latches   |
| <b>Finish</b>       | High quality white powder coat primer                                |
| <b>Packaging</b>    | Individually wrapped, 1 door per box                                 |

### POPULAR OPTIONS

For complete list of options go to [cendrex.com](http://cendrex.com)

|                 |  |
|-----------------|--|
| <b>Material</b> | Stainless steel (SS), Galvanneal steel (GS)  |
| <b>Other</b>    | Louvered doors (-140), holding cable (-160), double leaf (-180) masonry anchors (-240) |

\*Hardware made of zinc-plated steel



### PROJET DATA

|             |       |     |   |   |
|-------------|-------|-----|---|---|
| Project:    | Date: | QTY | W | H |
| Architech:  |       |     |   |   |
| Dealer:     |       |     |   |   |
| Contractor: |       |     |   |   |
| Location:   |       |     |   |   |

|   |
|---|
| Tagging instructions:                       |
| Special instructions:                       |
| Options:                                    |
| Submittal approval:<br>(Signature or stamp) |

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

### HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

### MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CI Detention deadbolt Key

### OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors