


TECHNICAL DATA SHEET • SPECIFICATIONS

FIBERGLASS REINFORCED GYPSUM ACCESS DOOR European hinge, round corners

GFRG-PUR-HIR

INSTALLATION

Technical drawing GFRG-PUR-HIR

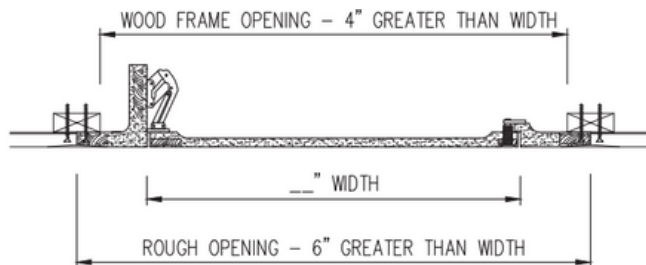

STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Weight	
inches	mm	lbs	KG
9 x 9	229 x 229	12.0	5.44
12 x 12	304 x 304	15.0	6.80
16 x 16	406 x 406	17.0	7.71
18 x 18	457 x 457	18.0	8.17
24 x 24	609 x 609	22.0	10.00

Your odd sizes: Made in 15 days

Rough wall opening is door size + 6" or + 152 mm


DESCRIPTION AND MATERIAL SPECIFICATION

Material	Lightweight fiberglass-reinforced gypsum
Hinge	European type hinge
Lock / Latch	Screwdriver cylinder cam-latch
Finish	Rounded corners (radius finish). To be primed and painted on site
Odd sizes available	Yes. Non-stocked doors manufactured in 15 business days.
Packaging	Individually wrapped, 1 access door per box

POPULAR OPTIONS

For complete list of options go to [cendrex.com](https://www.cendrex.com)

Corners	Square corners, round door
Hinges	Presence of hinges
Lock / Latch	Cylinder, screwdriver latch
Gaskets	Neoprene gasket

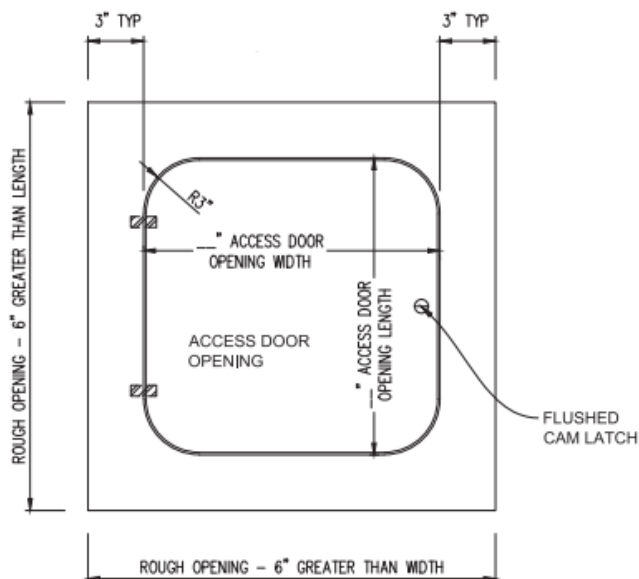

PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:
Special instructions:
Options:
Submittal approval: (Signature or stamp)

HEAD OFFICE
6500 Henri-Bourassa E. Blvd
Montreal QC H1G 5W9

cendrex
Made in Canada

Last updated: March 11, 2024
514-493-1489 | 1-800-479-1489
info@cendrex.com | [cendrex.com](https://www.cendrex.com)

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- ☐ **35**
Screwdriver operated
cam latch



- ☐ **220**
Screwdriver operated
cylinder Cam latch



- ☐ **80**
Ring/tool key operated slam
latch



- ☐ **55**
Hex head slam latch and ring key
operated slam latch



- ☐ **30**
Slide latch



- ☐ **50**
Allen hex head cam latch

HANDLES



- ☐ **25**
WITH KEY - 4" handle and key
operated cam latch



- ☐ **100K**
Key-operated recessed handle
cam latch with cap over key
path



- ☐ **20**
WITHOUT KEY - 4" handle
operated cam latch



- ☐ **22**
WITHOUT KEY - 4" handle
operated slam latch



- ☐ **21**
WITHOUT KEY
Fixed 4" handle



- ☐ **26**
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- ☐ **10**
Key-operated cylinder
cam latch



- ☐ **15**
Mortise cam latch preparation
15C
Mortise cam latch preparation,
keyed differently
15CKA
Mortise cam latch preparation,
keyed alike



- ☐ **85**
Mortise slam latch



- ☐ **85C**
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder
keyed alike



- ☐ **90**
Pinned hex head cam latch



- ☐ **C**
Cylinder cam latch,
keyed differently



- ☐ **CKA**
Cylinder cam latch,
keyed alike

MATERIALS



- ☐ **GS**
Galvanneal steel



- ☐ **AL**
Aluminum



- ☐ **SS**
Stainless steel



- ☐ **CR**
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- ☐ **40**
Mortise deadbolt lock



- ☐ **40C**
Mortise Deadbolt Lock with
Cylinder, keyed differently



- ☐ **40CKA**
Mortise deadbolt lock with
cylinder, keyed alike



- ☐ **99**
Inside release thumbturn for
mortise deadbolt lock



- ☐ **45**
Mortise preparation for
detention deadbolt lock



- ☐ **46**
Detention deadbolt lock



- ☐ **47**
CIDetention deadbolt Key

OTHERS



- ☐ **60**
Gasket



- ☐ **160**
Holding cable



- ☐ **240**
Masonry anchors