

TECHNICAL DATA SHEET • SPECIFICATIONS


FIBERGLASS REINFORCED GYPSUM ACCESS DOOR

Rounded removable access door, for drywall ceiling

GFRG-PUR-POR

INSTALLATION

Technical drawing GFRG-PUR-POR

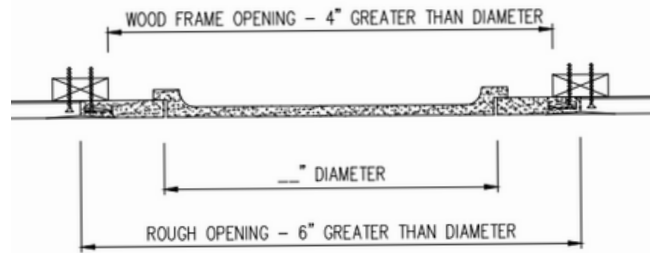


STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Weight	
inches	mm	lbs	KG
9 x 9	229 x 229	6.0	2,72
12 x 12	304 x 304	8.0	3,63
16 x 16	406 x 406	10.0	4,54
18 x 18	457 x 457	11.0	5,00
24 x 24	609 x 609	16.0	7,26

Your odd sizes: Made in 15 days

Rough wall opening is door size + 6" or + 152 mm

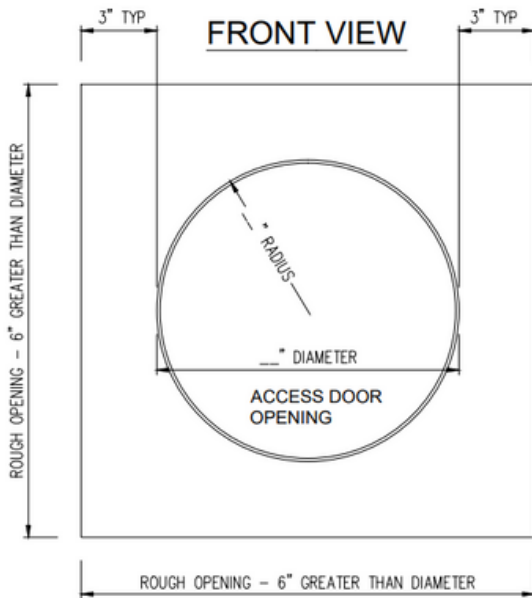

DESCRIPTION AND MATERIAL SPECIFICATION

Material	Lightweight fiberglass-reinforced gypsum
Hinge	No hinge. gravity based closure and removable door
Lock / Latch	None
Finish	Rounded corners (radius finish). To be primed and painted on site
Odd sizes available	Yes. Non-stocked doors manufactured in 15 business days.
Packaging	Individually wrapped, 1 access door per box

POPULAR OPTIONS

For complete list of options go to cendrex.com

Corners	Square corners, round door
Hinges	Presence of hinges
Lock / Latch	Cylinder, screwdriver latch
Gaskets	Neoprene gasket



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:
Special instructions:
Options:
Submittal approval: (Signature or stamp)

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CI Detention deadbolt Key

OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors