


TECHNICAL DATA SHEET • SPECIFICATIONS

MEDIUM-SECURITY FLUSH UNIVERSAL ACCESS DOOR WITH EXPOSED FLANGE Key-operated cylinder cam latch, piano hinge

MDS-00

INSTALLATION

Technical drawing MDS-00

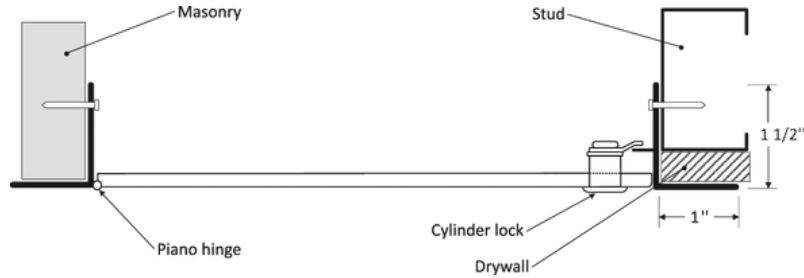


STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
12 x 12	304 x 304	1	6.8	3.1
16 x 16	406 x 406	1	10.3	4.7
18 x 18	457 x 457	1	12.5	5.7
24 x 24	609 x 609	1	19.9	9.0
24 x 30	609 x 762	2	24.9	11.3
24 x 36	609 x 914	2	28.1	12.8
36 x 36	914 x 914	2	39.8	18.1

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

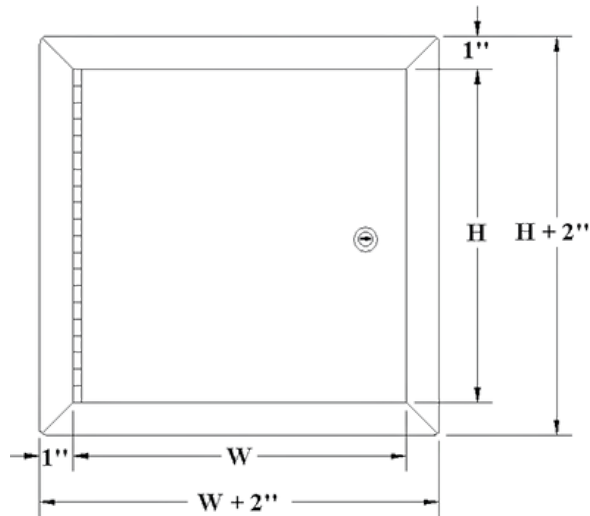

DESCRIPTION AND MATERIAL SPECIFICATION

Material	14-gauge galvalume steel
Hinge	Continuous piano hinge, located in the second dimension (height)
Lock / Latch	Key-operated cylinder cam latch with 2 keys per lock
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box

POPULAR OPTIONS

For complete list of options go to cendrex.com

Lock / Latch	Mortise deadbolt lock (-40, cylinder optional), mortise slam latch (-85, cylinder optional)
Handle	Fixed 4" handle (-21), 4" handle-operated slam latch (-22)
Material	Stainless Steel (SS), cold-rolled steel (CR)
Other	Neoprene gasket (-60), louvered door (-140)



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval:
(Signature or stamp)

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- ☐ **35**
Screwdriver operated cam latch



- ☐ **220**
Screwdriver operated cylinder Cam latch



- ☐ **80**
Ring/tool key operated slam latch



- ☐ **55**
Hex head slam latch and ring key operated slam latch



- ☐ **30**
Slide latch



- ☐ **50**
Allen hex head cam latch

HANDLES



- ☐ **25**
WITH KEY - 4" handle and key operated cam latch



- ☐ **100K**
Key-operated recessed handle cam latch with cap over key path



- ☐ **20**
WITHOUT KEY - 4" handle operated cam latch



- ☐ **22**
WITHOUT KEY - 4" handle operated slam latch



- ☐ **21**
WITHOUT KEY Fixed 4" handle



- ☐ **26**
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- ☐ **10**
Key-operated cylinder cam latch



- ☐ **15**
Mortise cam latch preparation
15C
Mortise cam latch preparation, keyed differently
15CKA
Mortise cam latch preparation, keyed alike



- ☐ **85**
Mortise slam latch



- ☐ **85C**
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder keyed alike



- ☐ **90**
Pinned hex head cam latch



- ☐ **C**
Cylinder cam latch, keyed differently



- ☐ **CKA**
Cylinder cam latch, keyed alike

MATERIALS



- ☐ **GS**
Galvanneal steel



- ☐ **AL**
Aluminum



- ☐ **SS**
Stainless steel



- ☐ **CR**
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- ☐ **40**
Mortise deadbolt lock



- ☐ **40C**
Mortise Deadbolt Lock with Cylinder, keyed differently



- ☐ **40CKA**
Mortise deadbolt lock with cylinder, keyed alike



- ☐ **99**
Inside release thumbturn for mortise deadbolt lock



- ☐ **45**
Mortise preparation for detention deadbolt lock



- ☐ **46**
Detention deadbolt lock



- ☐ **47**
CI Detention deadbolt Key

OTHERS



- ☐ **60**
Gasket



- ☐ **160**
Holding cable



- ☐ **240**
Masonry anchors