

# TECHNICAL DATA SHEET • SPECIFICATIONS


## FIRE-RATED UNINSULATED ACCESS DOOR WITH EXPOSED FLANGE

Self-latching tool-key operated slam latch, piano hinge

PFN-00

### INSTALLATION

Technical drawing PFN-00

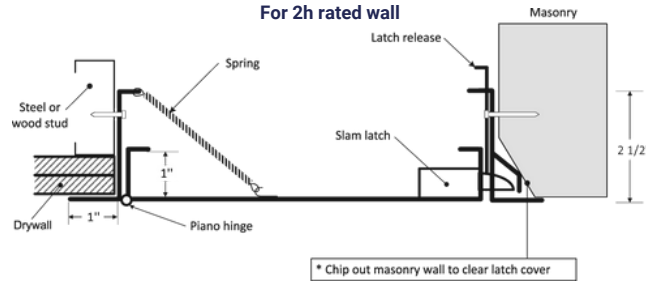

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements that apply to the installation and use of fire-rated access doors.

### STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8 x 8	203 x 203	1	6.1	2.8
10 x 10	254 x 254	1	7.7	3.5
12 x 12	304 x 304	1	9.3	4.2
14 x 14	355 x 355	1	11.3	5.1
16 x 16	406 x 406	1	13.2	6.0
18 x 18	457 x 457	1	15.4	7.0
22 x 22	558 x 558	1	20.4	9.3
22 x 30	558 x 762	1	25.2	11.4
22 x 36	558 x 914	2	29.8	13.5
24 x 24	609 x 609	1	22.8	10.3
24 x 36	609 x 914	2	31.5	14.3
30 x 30	762 x 762	1	31.9	14.5
32 x 32	812 x 812	2	35.8	16.2
36 x 36	914 x 914	2	42.3	19.2

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm


#### FOR VERTICAL USE ONLY:

Certified to standards: UBC 7-2 (1997), UL 10B (1997), UL 10B (2009), NFPA 252 (2003), NFPA 252 (2008), NFPA 252 (2012), CAN/ULC S104 (R1985), CAN/ULC S104 (2010).

Rating achieved: 1,5 hours, neutral/negative pressure

Maximum size: 36" wide x 36" high (914 mm x 914 mm). Maximum area of 1,296 in<sup>2</sup>. Tolerance on height and width limitation is ± 3" (76 mm) as long as the area does not exceed 1,296 in<sup>2</sup>.

Temperature rise: No rating achieved.

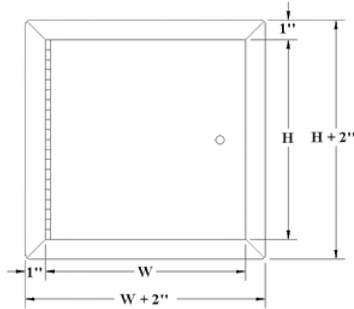

### DESCRIPTION AND MATERIAL SPECIFICATION

<b>Material</b>	16-gauge cold-rolled steel
<b>Hinge</b>	Continuous piano hinge, located in the second dimension (height)
<b>Lock / Latch</b>	Self-latching tool-key operated slam latch and/or ring operated slam latch, both included
<b>Finish</b>	High quality white powder coat primer
<b>Packaging</b>	Individually wrapped, 1 door per box
<b>Inside panel release</b>	Mechanism allowing panels to open from inside, standard on all doors over 12" x 12"

#### POPULAR OPTIONS

For complete list of options go to [cendrex.com](http://cendrex.com)

<b>Lock / Latch</b>	Key-operated cylinder cam latch (-10), mortise slam latch (-85, cylinder optional), mortise deadbolt lock (-40, cylinder optional)
<b>Handle</b>	Fixed 4" handle (-21), 4" handle-operated slam latch (-22)
<b>Material</b>	Stainless Steel (SS), Galvanneal steel (GS)
<b>Other</b>	Neoprene gasket (-60), masonry anchors (-240)



### PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:
Special instructions:
Options:
Submittal approval: (Signature or stamp)

HEAD OFFICE  
6500 Henri-Bourassa E. Blvd  
Montreal QC H1G 5W9

**cendrex**  
Made in Canada

Last updated: December 28, 2023  
514-493-1489 | 1-800-479-1489  
info@cendrex.com | [cendrex.com](http://cendrex.com)

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

### HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

### MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CI Detention deadbolt Key

### OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors