


TECHNICAL DATA SHEET • SPECIFICATIONS

HIGH-SECURITY FLUSH UNIVERSAL ACCESS DOOR WITH EXPOSED FLANGE Mortise deadbolt lock, heavy-duty butt hinge

PHS-40

INSTALLATION

Technical drawing PHS-40

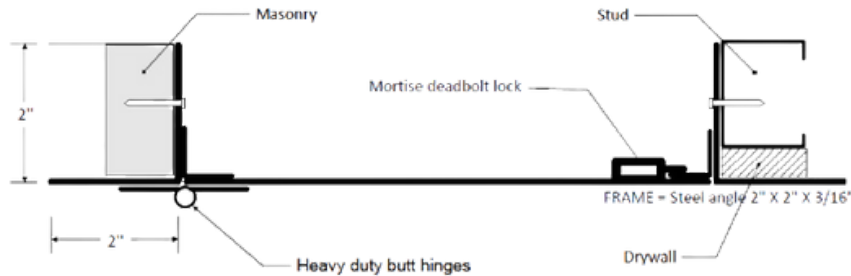


STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
12 x 12	304 x 304	1	15.3	6.9
16 x 16	406 x 406	1	21.6	9.8
18 x 18	457 x 457	1	25.2	11.4
24 x 24	609 x 609	1	38.0	17.2
24 x 30	609 x 762	1	45.1	20.5
24 x 36	609 x 914	1	52.6	23.9
36 x 36	914 x 914	1	72.1	32.7

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

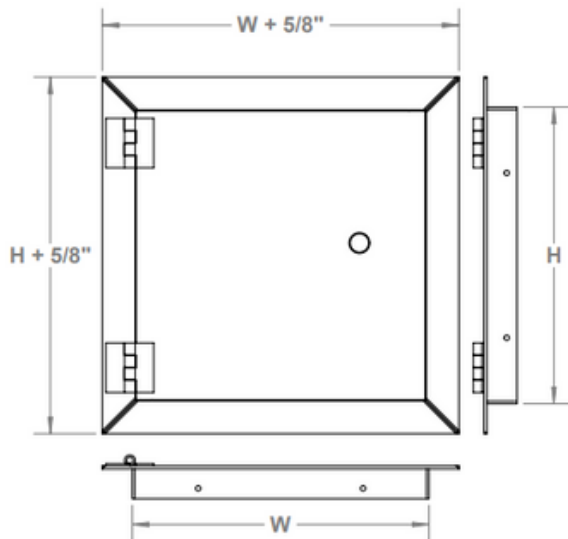

DESCRIPTION AND MATERIAL SPECIFICATION

Material	10-gauge cold-rolled steel for the door and hot-rolled stamped steel frame with a 2" x 2" x 1/16" angle
Hinge	3" x 3" heavy-duty butt hinge, 13-gauge cold-rolled steel, located on the second dimension (height)
Lock / Latch	Mortise deadbolt lock. Recommended for high-security applications.
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box

POPULAR OPTIONS

For complete list of options go to cendrex.com

Handle	Fixed 4" handle (-21), 4" handle key-operated cam latch (-25)
Other	Masonry anchors (-240)



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval:
(Signature or stamp)

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- 35** Screwdriver operated cam latch



- 220** Screwdriver operated cylinder Cam latch



- 80** Ring/tool key operated slam latch



- 55** Hex head slam latch and ring key operated slam latch



- 30** Slide latch



- 50** Allen hex head cam latch

HANDLES



- 25** WITH KEY - 4" handle and key operated cam latch



- 100K** Key-operated recessed handle cam latch with cap over key path



- 20** WITHOUT KEY - 4" handle operated cam latch



- 22** WITHOUT KEY - 4" handle operated slam latch



- 21** WITHOUT KEY Fixed 4" handle



- 26** WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- 10** Key-operated cylinder cam latch



- 15** Mortise cam latch preparation
- 15C** Mortise cam latch preparation, keyed differently
- 15CKA** Mortise cam latch preparation, keyed alike



- 85** Mortise slam latch



- 85C** Mortise slam latch with cylinder
- 85CKA** Mortise slam latch cylinder keyed alike



- 90** Pinned hex head cam latch



- C** Cylinder cam latch, keyed differently



- CKA** Cylinder cam latch, keyed alike

MATERIALS



- GS** Galvanneal steel



- AL** Aluminum



- SS** Stainless steel



- CR** Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- 40** Mortise deadbolt lock



- 40C** Mortise Deadbolt Lock with Cylinder, keyed differently



- 40CKA** Mortise deadbolt lock with cylinder, keyed alike



- 99** Inside release thumbturn for mortise deadbolt lock



- 45** Mortise preparation for detention deadbolt lock



- 46** Detention deadbolt lock



- 47** CIDetention deadbolt Key

OTHERS



- 60** Gasket



- 160** Holding cable



- 240** Masonry anchors