


TECHNICAL DATA SHEET • SPECIFICATIONS

RECESSED ALUMINUM ACCESS DOOR WITH HIDDEN FLANGE Concealed push latches, concealed free-pivot hinge

RAL-00

INSTALLATION

Technical drawing RAL-00

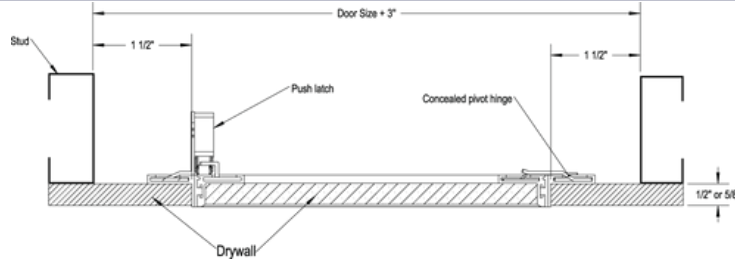

STANDARD DIMENSIONS AND APPEARANCE


Dimensions • W X H		Recessed 1/2"	Weight	
		Number of locks	lbs	KG
inches	mm			
8 x 8	203 x 203	2	2.3	1.0
12 x 12	304 x 304	2	3.5	1.6
16 x 16	406 x 406	2	4.9	2.2
18 x 18	457 x 457	2	5.8	2.6
20 x 20	508 x 508	2	6.7	3.0
24 x 24	609 x 609	2	8.8	4.0
36 x 36	914 x 914	2	16.9	7.7
24 x 48	609 x 1219	2	15.5	7.0
Your odd sizes: Made in 15 days				

Dimensions • W X H		Recessed 5/8"	Weight	
		Number of locks	lbs	KG
inches	mm			
8 x 8	203 x 203	2	2.8	1.3
12 x 12	304 x 304	2	4.4	2.0
16 x 16	406 x 406	2	6.5	3.0
18 x 18	457 x 457	2	7.8	3.5
20 x 20	508 x 508	2	9.1	4.1
24 x 24	609 x 609	2	12.2	5.5
36 x 36	914 x 914	2	24.2	11.0
24 x 48	609 x 1219	2	22.1	10.0
Your odd sizes: Made in 15 days				

Rough wall opening is door size +
3/8" or + 9.5 mm

OTHER TECHNICAL INFORMATION

For wall installation, hinges must be
located along the floor side (width).



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				


DESCRIPTION AND MATERIAL SPECIFICATION

Material	Extruded mill-finish aluminum
Hinge	Concealed free-pivot hinge, located on the first dimension (width)
Lock / Latch	Concealed push latch(es)
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Removable door	Yes (with retaining cables)

POPULAR OPTIONS

For complete list of options go to cendrex.com


Lock / Latch	Key-operated cylinder cam latch (-10), screwdriver-operated cylinder cam latch (-220)
Other	Double-leaf (-180)

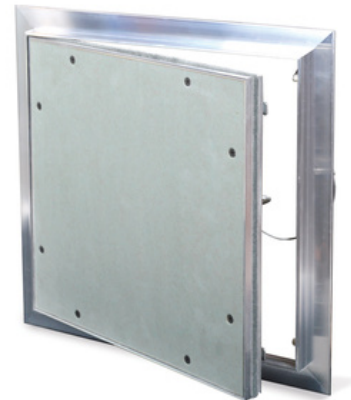



OPTIONS


This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.


LOW SECURITY LOCKING MECHANISM


-  ☐ **35** Screwdriver operated cam latch

-  ☐ **220** Screwdriver operated cylinder Cam latch


-  ☐ **80** Ring/tool key operated slam latch


-  ☐ **55** Hex head slam latch and ring key operated slam latch


-  ☐ **30** Slide latch


-  ☐ **50** Allen hex head cam latch


HANDLES


-  ☐ **25** WITH KEY - 4" handle and key operated cam latch

-  ☐ **100K** Key-operated recessed handle cam latch with cap over key path


-  ☐ **20** WITHOUT KEY - 4" handle operated cam latch


-  ☐ **22** WITHOUT KEY - 4" handle operated slam latch


-  ☐ **21** WITHOUT KEY Fixed 4" handle


-  ☐ **26** WITHOUT KEY - L handle


MEDIUM SECURITY LOCKING MECHANISM



-  ☐ **10** Key-operated cylinder cam latch

-  ☐ **15** Mortise cam latch preparation
15C Mortise cam latch preparation, keyed differently
15CKA Mortise cam latch preparation, keyed alike


-  ☐ **85** Mortise slam latch


-  ☐ **85C** Mortise slam latch with cylinder
85CKA Mortise slam latch cylinder keyed alike


-  ☐ **90** Pinned hex head cam latch


-  ☐ **C** Cylinder cam latch, keyed differently
-  ☐ **CKA** Cylinder cam latch, keyed alike

MATERIALS


-  ☐ **GS** Galvanneal steel


-  ☐ **AL** Aluminum


-  ☐ **SS** Stainless steel


-  ☐ **CR** Cold rolled steel


HIGH SECURITY LOCKING MECHANISM


-  ☐ **40** Mortise deadbolt lock

-  ☐ **40C** Mortise Deadbolt Lock with Cylinder, keyed differently
40CKA Mortise deadbolt lock with cylinder, keyed alike


-  ☐ **99** Inside release thumbturn for mortise deadbolt lock


-  ☐ **45** Mortise preparation for detention deadbolt lock


-  ☐ **46** Detention deadbolt lock

-  ☐ **47** CIDetention deadbolt Key

OTHERS

-  ☐ **60** Gasket

-  ☐ **160** Holding cable

-  ☐ **240** Masonry anchors