

# TECHNICAL DATA SHEET • SPECIFICATIONS


## FLUSH UNIVERSAL REMOVABLE PLASTIC ACCESS DOOR WITH EXPOSED FLANGE

Snap friction catch, no hinge

RPL-00

### INSTALLATION


Technical drawing RPL-00



### STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Weight	
inches	mm	lbs	KG
6 x 9	152 x 229	0.5	0.22
8 x 8	203 x 203	0.5	0.22
14 x 14	356 x 356	1.95	0.88
14 x 29	356 x 737	4.55	2.06

Rough wall opening:  
6" X 9" = 6 3/8" X 9 3/8"  
8" X 8" = 8 3/8" X 8 3/8"  
14" X 14" = 14" X 14"  
14" X 29" = 14" X 29 1/2"

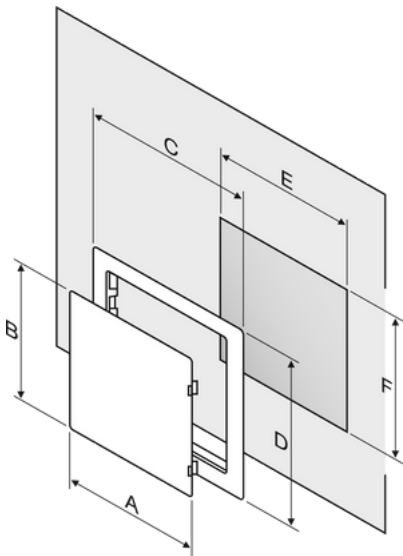

### DESCRIPTION AND MATERIAL SPECIFICATION

Material	High-impact ABS plastic with UV stabilizers
Hinge	No hinge
Lock / Latch	Snap friction catch and removable door
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Instruction	Apply construction adhesive to the back side of the frame



### PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:
Special instructions:
Options:
Submittal approval: (Signature or stamp)

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM



- ☐ **35**  
Screwdriver operated  
cam latch



- ☐ **220**  
Screwdriver operated  
cylinder Cam latch



- ☐ **80**  
Ring/tool key operated slam  
latch



- ☐ **55**  
Hex head slam latch and ring key  
operated slam latch



- ☐ **30**  
Slide latch



- ☐ **50**  
Allen hex head cam latch

### HANDLES



- ☐ **25**  
WITH KEY - 4" handle and key  
operated cam latch



- ☐ **100K**  
Key-operated recessed handle  
cam latch with cap over key  
path



- ☐ **20**  
WITHOUT KEY - 4" handle  
operated cam latch



- ☐ **22**  
WITHOUT KEY - 4" handle  
operated slam latch



- ☐ **21**  
WITHOUT KEY  
Fixed 4" handle



- ☐ **26**  
WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM



- ☐ **10**  
Key-operated cylinder  
cam latch



- ☐ **15**  
Mortise cam latch preparation  
**15C**  
Mortise cam latch preparation,  
keyed differently  
**15CKA**  
Mortise cam latch preparation,  
keyed alike



- ☐ **85**  
Mortise slam latch



- ☐ **85C**  
Mortise slam latch with cylinder  
**85CKA**  
Mortise slam latch cylinder  
keyed alike



- ☐ **90**  
Pinned hex head cam latch



- ☐ **C**  
Cylinder cam latch,  
keyed differently



- ☐ **CKA**  
Cylinder cam latch,  
keyed alike

### MATERIALS



- ☐ **GS**  
Galvanneal steel



- ☐ **AL**  
Aluminum



- ☐ **SS**  
Stainless steel



- ☐ **CR**  
Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM



- ☐ **40**  
Mortise deadbolt lock



- ☐ **40C**  
Mortise Deadbolt Lock with  
Cylinder, keyed differently



- ☐ **40CKA**  
Mortise deadbolt lock with  
cylinder, keyed alike



- ☐ **99**  
Inside release thumbturn for  
mortise deadbolt lock



- ☐ **45**  
Mortise preparation for  
detention deadbolt lock



- ☐ **46**  
Detention deadbolt lock



- ☐ **47**  
CIDetention deadbolt Key

### OTHERS



- ☐ **60**  
Gasket



- ☐ **160**  
Holding cable



- ☐ **240**  
Masonry anchors