


**FIBERGLASS-REINFORCED GYPSUM ACCESS DOOR
- EUROPEAN HINGE, ROUND CORNERS**
GFRG
HINGED RADIUS CORNER


INSTALLATION

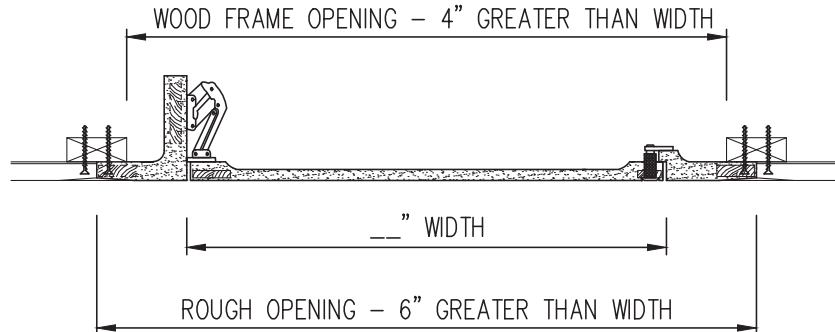

DIMENSION AND APPEARANCE

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
9 x 9 (229 x 229)	12	5.44
12 x 12 (304 x 304)	15	6.80
16 x 16 (406 x 406)	17	7.71
18 x 18 (457 x 457)	18	8.17
24 x 24 (609 x 609)	22	10.00

Rough wall opening = door size + 6"

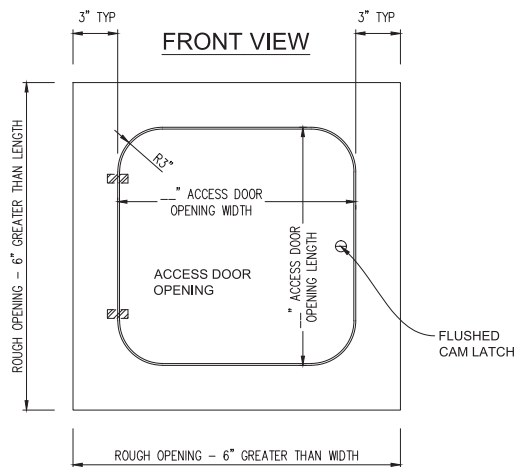

DESCRIPTION AND MATERIAL SPECIFICATION

Material: Lightweight glass fiber reinforced gypsum.

Hinge: European type hinge.

Lock / latch: Screwdriver cylinder cam-latch

Finish: Rounded corners (radius finish). To be primed and sealed on site.

Odd sizes available: Yes. Non-stocked doors manufactured in 15 business days.

Packaging: Individually wrapped. 1 per box.

POPULAR OPTIONS For complete list of options go to: www.cendrex.com

Cylinder with key, touch latch, keyed cam latch, gasketing (neoprene gasket).

PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

HEAD OFFICE: 11 303, 26th avenue, Montreal, Quebec, Canada H1E 6N6

WAREHOUSES IN USA: California, Colorado, Florida, Illinois, Kansas City, Pennsylvania, Texas, Washington

Tel.: 514 493-1489 - 1 800 479-1489

Fax: 514 493-1992 - 1 800 297-1489

www.cendrex.com

info@cendrex.com