

# TECHNICAL DATA SHEET • SPECIFICATIONS


## LARGE OPENING REMOVABLE 20 GA ACCESS DOOR WITH DRYWALL BEAD FLANGE

Screwdriver cam latch, spring pin hinge

AHU-GYP-00

### INSTALLATION

Technical drawing AHU-GYP-00

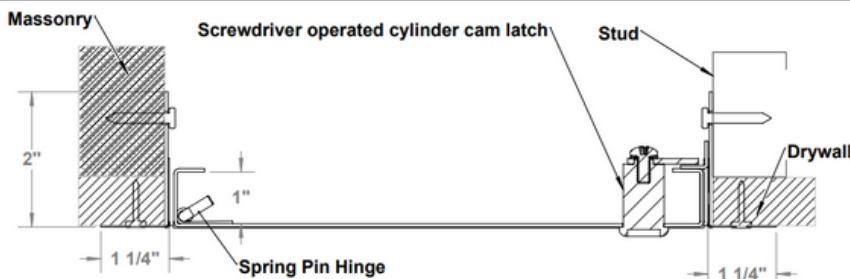

### STANDARD DIMENSIONS AND APPEARANCE


Dimensions • W X H		Number of locks		Weight	
inches	mm			lbs	KG
30 x 66	762 x 1676	2		35.0	15.8
30 x 72	762 x 1828	2		37.8	17.1
36 x 72	914 x 1828	2		43.1	19.5
48 x 48	1219 x 1219	2		37.9	17.1

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

### OTHER TECHNICAL INFORMATION

Maximum dimensions: W ≤ 96 in, H ≤ 96 in, and W x H ≤ 2880 in<sup>2</sup>.

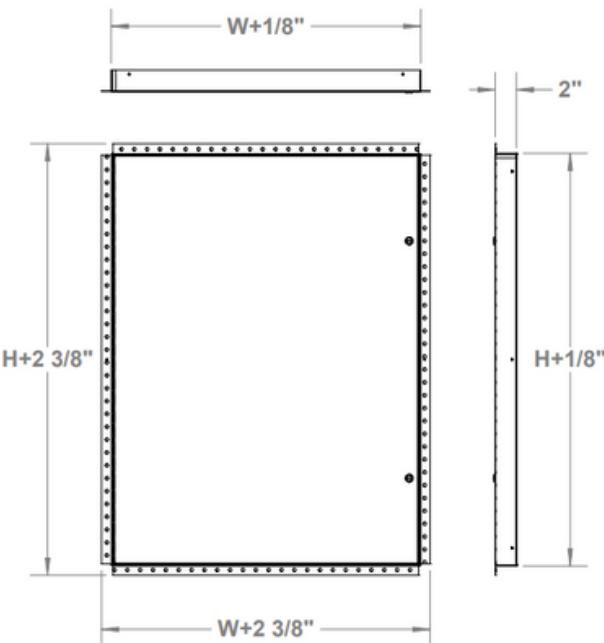

### PROJECT DATA

Project:	Date:	QTY	W	H
Architect:				
Dealer:				
Contractor:				
Location:				


### DESCRIPTION AND MATERIAL SPECIFICATION

Material	Cold-rolled steel, 20-gauge door, and 16-gauge frame
Hinge	Pin and spring pin hinge, located on the second dimension (height)
Lock / Latch	Screwdriver-operated cam latch
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Flange	22-gauge galvanized steel, 1 1/8" drywall bead flange
Frame	2" in depth, made of cold rolled steel

### POPULAR OPTIONS

For complete list of options go to [cendrex.com](http://cendrex.com)

Lock / Latch	Key-operated cylinder cam latch (-10), mortise cam latch preparation (-15, cylinder optional), mortise deadbolt lock (-40, cylinder optional)
Handle	4" handle operated cam latch (-20), 4" handle and key operated cam latch (-25)
Other	Double leaf (-180)

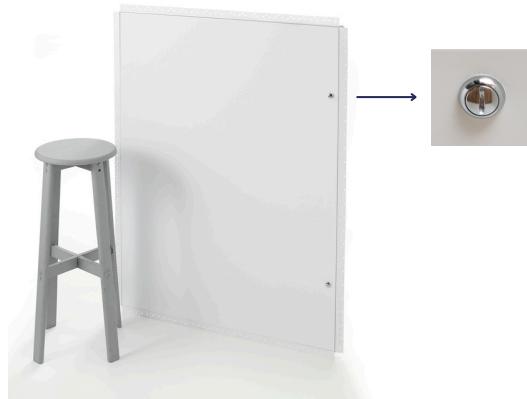

Tagging instructions:

Special instructions:

Options:

Submittal approval:  
(Signature or stamp)

# TECHNICAL DATA SHEET • OPTIONS

## OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

### LOW SECURITY LOCKING MECHANISM

	<b>35</b>	<input type="checkbox"/> Screwdriver operated cam latch
	<b>220</b>	<input type="checkbox"/> Screwdriver operated cylinder Cam latch
	<b>80</b>	<input type="checkbox"/> Ring/tool key operated slam latch
	<b>55</b>	<input type="checkbox"/> Hex head slam latch and ring key operated slam latch
	<b>30</b>	<input type="checkbox"/> Slide latch
	<b>50</b>	<input type="checkbox"/> Allen hex head cam latch

### HANDLES

	<b>25</b>	<input type="checkbox"/> WITH KEY - 4" handle and key operated cam latch
	<b>100K</b>	<input type="checkbox"/> Key-operated recessed handle cam latch with cap over key path
	<b>20</b>	<input type="checkbox"/> WITHOUT KEY - 4" handle operated cam latch
	<b>22</b>	<input type="checkbox"/> WITHOUT KEY - 4" handle operated slam latch
	<b>21</b>	<input type="checkbox"/> WITHOUT KEY Fixed 4" handle
	<b>26</b>	<input type="checkbox"/> WITHOUT KEY - L handle

### MEDIUM SECURITY LOCKING MECHANISM

	<b>10</b>	<input type="checkbox"/> Key-operated cylinder cam latch
	<b>15</b>	<input type="checkbox"/> Mortise cam latch preparation
	<b>15C</b>	<input type="checkbox"/> Mortise cam latch preparation, keyed differently
	<b>15CKA</b>	<input type="checkbox"/> Mortise cam latch preparation, keyed alike
	<b>85</b>	<input type="checkbox"/> Mortise slam latch
	<b>85C</b>	<input type="checkbox"/> Mortise slam latch with cylinder
	<b>85CKA</b>	<input type="checkbox"/> Mortise slam latch cylinder keyed alike
	<b>90</b>	<input type="checkbox"/> Pinned hex head cam latch

### MATERIALS

	<b>GS</b>	<input type="checkbox"/> Galvanneal steel
	<b>AL</b>	<input type="checkbox"/> Aluminum
	<b>SS</b>	<input type="checkbox"/> Stainless steel
	<b>CR</b>	<input type="checkbox"/> Cold rolled steel

### HIGH SECURITY LOCKING MECHANISM

	<b>40</b>	<input type="checkbox"/> Mortise deadbolt lock
	<b>40C</b>	<input type="checkbox"/> Mortise Deadbolt Lock with Cylinder, keyed differently
	<b>40CKA</b>	<input type="checkbox"/> Mortise deadbolt lock with cylinder, keyed alike
	<b>99</b>	<input type="checkbox"/> Inside release thumbturn for mortise deadbolt lock
	<b>45</b>	<input type="checkbox"/> Mortise preparation for detention deadbolt lock
	<b>46</b>	<input type="checkbox"/> Detention deadbolt lock
	<b>47</b>	<input type="checkbox"/> CI Detention deadbolt Key
	<b>60</b>	<input type="checkbox"/> Gasket
	<b>160</b>	<input type="checkbox"/> Holding cable
	<b>240</b>	<input type="checkbox"/> Masonry anchors

### OTHERS